

GL 312

Structural Epoxy Adhesive

Description

GL 312 is a structural epoxy adhesive based on epoxy resins. It has very good water resistance and has enhanced adhesion. This system is of low viscosity and wets the glass fiber network well. It is recommended for structural applications, laminations, and for quality boats.

Applications

1. Low viscosity, good seepage epoxy adhesive for fiber reinforced structures.


Guidelines for Use

1. Mix Part A resin and Part B hardener in the ratio of 100 : 30 by weight.
2. The pot life is 60 minutes. Processing or pouring the mixed epoxy after 1 hour may tend to trap bubbles.
3. The epoxy may be poured over the object, spread with a brush, or dispensed with a syringe.
4. Blowing hot air over the surface of the epoxy can break any bubbles formed during mixing.
5. Wipe off any excess uncured epoxy with a piece of dry cloth or tissue. Further cleaning may be achieved with tissue wetted with isopropanol (IPA).
6. The epoxy will harden in 24 hours. Full hardness will be achieved in 3 days. Faster curing can be achieved at elevated temperatures.

Properties

Property	Test Method	Unit	Typical Value		
			Part A Resin	Part B Hardener	Mixed
Chemical type	-	-	Epoxy	Amine	
Appearance	Pen 10	-	Clear liquid	Clear liquid	
Mix ratio, by weight	-	-	100	30	
Shelf life, 25°C	Pen 26	Month	12	12	
Pot life, 30°C	Pen 57	Hour			1
Viscosity, CAP 2000+ Viscometer, 30°C	Pen 44	cP	7300	16	875
Hardness, cured 30°C for 24 hours	Pen 29	Shore D			77
Tensile strength, cured 30°C for 24 hours	Pen 41	MPa			61
Young's Modulus, cured 30°C for 24 hours	Pen 41	MPa			2560
Strain to failure (percentage of elongation), cured 40°C for 24 hours	Pen 41	%			3.9

Changes in viscosity with time for GL 312 at 30 °C

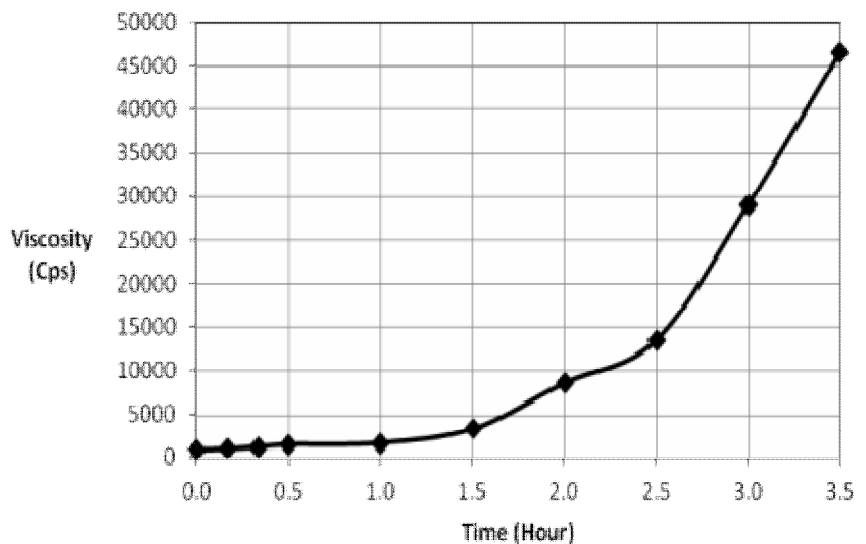

7. Handle Part B with protective equipment. Do not expose to atmosphere more than 10 minutes.

Storage

Tightly close original container of unused product. To store in a cool and dark place.

Packaging

- 1 kg plastic bottle
- 5 kg plastic bottle

Environment, Health & Safety

This product is RoHS compliant. It does not contain any known carcinogenic, mutagenic or teratogenic components.

Contact Information

Penchem Technologies Sdn Bhd
(767120-A), 1015, Jalan
Perindustrian Bukit Minyak 7,
14100 Penang, Malaysia
T: +604-501 5976, 77, 78, 79
E: enquiry@penchem.com
W: www.penchem.com

Revision 3.12-Jul-18. JT